

Autorange

20 A/200 A/1200 A

For 3 phase power analyzer DW-6092

1200 A AC CURRENT PROBE

Model : CP-1200

ISO-9001, CE, IEC1010

www.yalab.com.tw

02-2389-0101



Lutron

www.YaLAB.com.tw

The Art of Measurement

1200 A AC CURRENT PROBE

Model : CP-1200


www.YaLAB.com.tw 02-2389-0101

FEATURE

* Autorange : 20 A/200 A/1200 A.
* Max. conductor size : 50 mm (1.9 inch) Dia.
* Operation frequency : 50 Hz/60 Hz.
* Optional current probe for DW-6092.
* When change the new probe, the calibration procedures are not necessary to be executed.
* Signal output use the banana plugs, durable and safety.
* Power supply is from the meter (DW-6092), battery is not necessary.

SPECIFICATIONS

Measurement ranges	Autorange : 20 A/200 A/1200 A,
Accuracy	± 0.5% F.S. * F.S. : Full scale of range. * 50/60 Hz * 23 ±5 °C
Frequency range	45 to 400 Hz. * Accuracy tested under 50/60 Hz.
Phase error	< ± 1° * 50/60 Hz..
Minimum load	100 K ohm for specified accuracy.
Enclosure material	UL 94-V0 rated.
Safety	IEC 1010, Categories III 600V.
Power Supply	Power supply is from the meter (DW-6092), battery is not necessary. * Power supply voltage from DW-6092, is DC 8V± 1V..
Max. Jaw Open Size	50 mm (2.0 inch) Dia.
Operating Temperature	0°C to 50°C (32°F to 122°F).
Operating Humidity	Less than 80% RH.
Dimension	210 x 64 x 33 mm. (8.3 X 2.5 X 1.3 inch). Cable length : 4 meters (13.17 feet).
Weight	490 g (1.08 LB).
Accessory Included	Operating manual 1 PC.

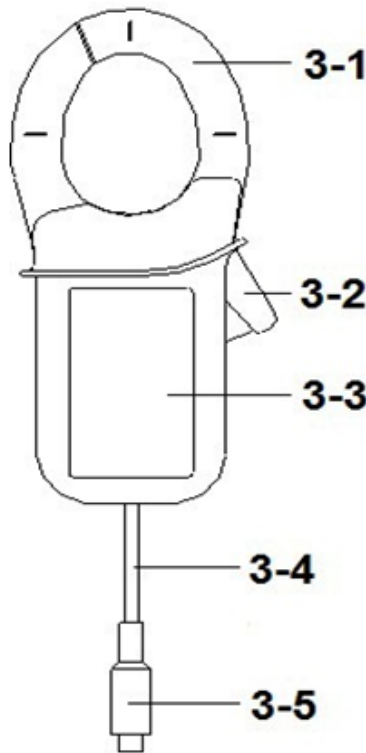

3-1 Current Sensing Jaws 3-2 Trigger
3-3 Main circuit unit 3-4 Cable
3-5 Signal output & DCV power input plug

CP-1200-1809M

* Appearance and specifications listed in this brochure are subject to change without notice.

www.YaLAB.com.tw 02-2389-0101