

UVA LIGHT METER

Model : SP-82UV

ISO-9001, CE, IEC1010

www.yalab.com.tw 02-2389-0101



290 nm to 390 nm



Lutron

www.YaLAB.com.tw

The Art of Measurement

UVA LIGHT METER

Model : SP-82UV


www.YaLAB.com.tw 02-2389-0101

FEATURE

* UV light measurement, calibration is executed under the UVA light & and compare with the standard UVA light meter.
* UV sensor structure The exclusive UV photo sensor with the cosine correction filter.
* UV sensor spectrum Band pass 290 nm to 390 nm.
* Tiny bone shape with light weight and small size case design are suitable for handling with one hand.
* Wristlet design provides extra protection to the instrument especially for user one hand operation.
* Built- in microprocessor circuit assures excellent performance and accuracy.
* Concise and compact buttons arrangement, easy operation.
* Memorize the maximum and minimum value with recall.
* Hold function to freeze the current reading value.

GENERAL SPECIFICATION

GENERAL SPECIFICATIONS	
Display	8 mm LCD display
Measurement	UV Light
Operating Humidity	Max. 80% RH.
Operating Temperature	0 to 50 °C (32 to 122 °F)
Over Input Display	Indication of "----"
Power Supply	CR 2032 DC 3V battery
Power Consumption	Approx. DC 5 mA
Weight	160g (battery included)
Dimension	HWD 120 x 45 x 20 mm (4.7 x 1.8 x 1.2 inch).
Standard Accessory	Instruction Manual

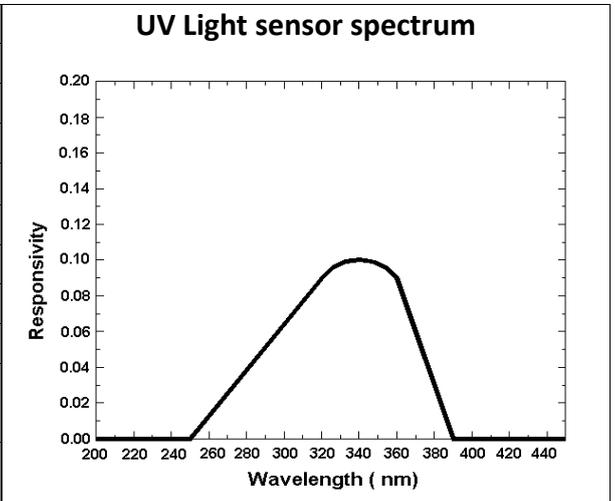

ELECTRICAL SPECIFICATIONS (23± 5 °C)

ELECTRICAL SPECIFICATION (23 ± 5 °C)		
UV Light	* auto range	* UVA light measurement
Range	Resolution	Accuracy
0 to 1999 uW/cm ²	1 uW/cm ²	± (4 % FS + 2 dgt)
2 to 20.00 mW/cm ²	0.01 mW/cm ²	FS : full scale
Remark		
* Calibration is executed under the UVA light & and compare with the standard UVA light meter.		
* UV Sensor structure : The exclusive UV photo sensor with the cosine correction filter.		
* UV sensor spectrum Band pass 250 nm to 390 nm.		

* Appearance and specifications listed in this brochure are subject to change without notice.

1610-BVB8207SD

www.YaLAB.com.tw

02-2389-0101