

Pocket


CAPACITANCE METER

Model : DM-9033

ISO-9001, CE, IEC1010

www.yalab.com.tw

02-2389-0101

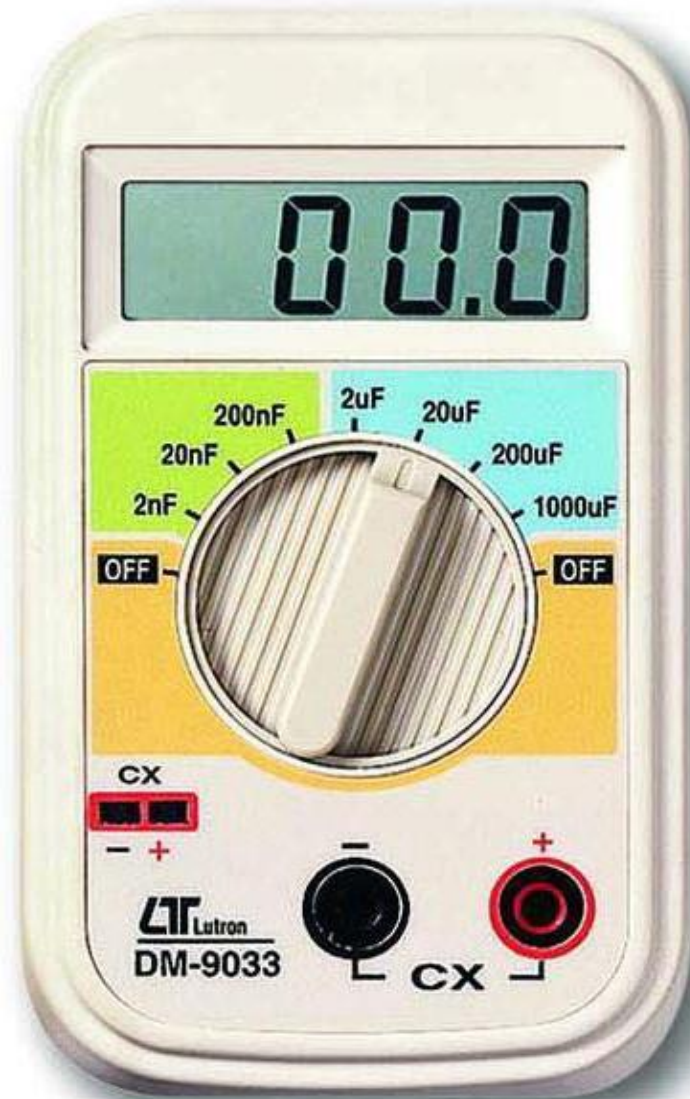

Lutron

www.YaLAB.com.tw

The Art of Measurement

Pocket Size

CAPACITANCE METER

Model : DM-9033

www.YaLAB.com.tw 02-2389-0101

FEATURE

- *Pocket size digital capacitance meter, easy operation and carry out.
- *LCD display, easy read-out.
- * Multi-ranges : 2 nF, 20 nF, 200 nF, 2 uF, 20 uF, 200 uF, & 1000 uF.
- *Compact & strong housing case.

GENERAL SPECIFICATION

Display	13 mm (0.5") LCD, 3 1/2 digits. Max. reading 1999.	
Range	7 ranges : 2 nF, 20 nF, 200 nF, 2 uF, 20 uF, 200 uF, 1000 uF.	
Over-input indicator	" 1 " mark indication.	
Sampling Time	Approx. 0.4 second.	
Operating Temp.	0 to 50 °C (32 to 122 °F).	
Operating Humidity	Less than 80% RH.	
Power Supply	006 P DC 9V battery.	
Power Consumption	Approx. DC 3 mA.	
Dimensions	120 x 72 x 37 mm (4.7 x 2.8 x 1.4 inch).	
Weight	185 g/0.41 LB.	
Accessories Included	Test alligator clips (red & black)	1 pair.
	Instruction Manual	1 PC.

ELECTRICAL SPECIFICATIONS (23± 5 °C)

RANGE	RESOLUTION	TEST FREQUENCY	ACCURACY
2 nF	1 pF	70 Hz	± (3 % + 1 d)
20 nF	10 pF	70 Hz	± (2 % + 3 d)
200 nF	100 pF	70 Hz	
2 uF	1 nF	70 Hz	
20 uF	10 nF	70 Hz	
200 uF	100 nF	70 Hz	± (5 % + 5 d)
1000 uF	1 uF	70 Hz	

pF = pico farad (10⁻¹²) nF = nano farad (10⁻⁹) uF = micro farad (10⁻⁶)

Remark :

Though the internal test frequency is approx. 70 Hz, however the accuracy adjustment are executed as :

- * For the 2 uF, 200 nF, 20 nF, 2 nF range, the accuracy adjustment is compared with the " Standard capacitor that tested under the 1 KHz frequency ".
- * For the capacitance 20 uF, 200 uF, 1000 uF range, the accuracy adjustment is compared with the " Standard capacitor that tested on the 100 Hz frequency ".

* Appearance and specifications listed in this brochure are subject to change without notice.

0609-DM-9033

www.YaLAB.com.tw

02-2389-0101