


## DS-9000 數位閃頻儀轉速計



### HIGH LUMINANCE LED STROBOSCOPE

- Range : 40.0 to 99,999 FPM
- Trigger Duty : 68uS at 5,000 fpm / 12uS. at 30,000 fpm  
6uS. at 60,000 fpm / 4.5uS. at 90,000 fpm
- LED Lamp : 12 pcs high power LED lamps more brighter.
- Display : LCD with back light.
- Power : 100-240V AC Adaptor / DC5V - 3A
- External Trigger Input : max. DC12V, Signal, Ground.
- External Trigger Range : Below 10,000 FPM (166.6 Hz).

- Signal Output : DC signal 12V (3.5mm phone jack)  
(Individual Input and Output jacks provided for multi  
strobos, triggering from a source stroboscope.)
- Timer : 1, 5, 10 minutes, Continuous.
- Internal Phase Shift : Adjustable 1°/step, keep the  
target precisely in view.

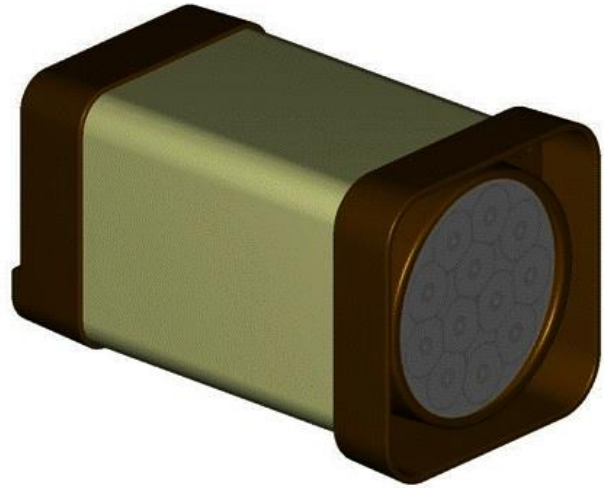

**YALAB** 儀器科技網

[www.YaLAB.com.tw](http://www.YaLAB.com.tw)

- 1 測試範圍：40.0 – 99999RPM
- 2 準確性：±(0.02%+3D)
- 3 5位大型 10mm 背光 LCD 顯示儀表板
- 4 高精密度，數字顯示
- 5 全按鍵式操作，轉速測量範圍廣，精確度高
- 6 三組設定記憶轉速
- 7 超級耐用，省電/不發燙
- 8 超級耐操，連續使用 1000 小時以上不停機
- 9 高亮度 LED 強力 12W 閃燈組
- 10 耐用 1 萬小時以上
- 11 交換式電源(100V-240V)
- 12 極省電，消耗功率僅 4W
- 13 可串接兩台同步使用，增加一倍亮度
- 14 特殊功能鍵"x2"和"÷2"
- 15 可拆式槍式把手
- 16 可以使用照相機三腳架固定儀器
- 17 極輕量，約重 1.5KG
- 18 附硬式儀器攜帶盒

閃頻儀適用用途：

馬達轉速快速確認，生產線品質管制，實驗室，印刷廠，紡織廠

技術聯絡人：

邁多科技股份有限公司 02-2389-0101 [www.YaLAB.com.tw](http://www.YaLAB.com.tw)